


# [e] ENPHASE ENVOY COMMUNICATIONS GATEWAY

Enphase Micro-inverters

Communications

Enlighten website

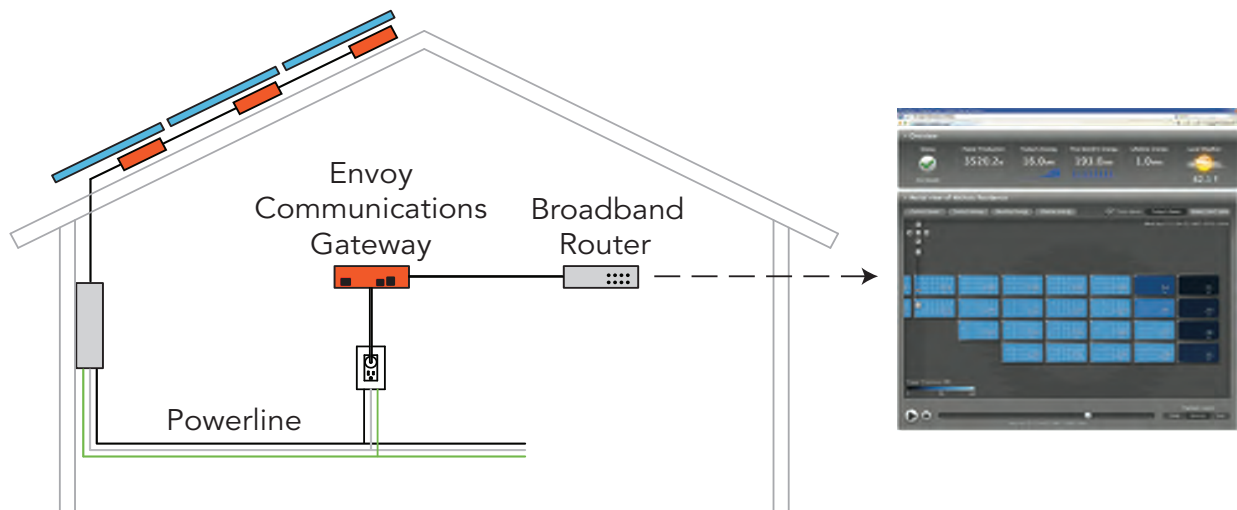

The Enphase micro-inverter continuously monitors itself and the performance of its associated PV module. This data is communicated over the existing power line to the Enphase Envoy communications gateway.

Enphase Envoy may be plugged into any AC wall socket and connected using a standard ethernet cable to a broadband router, making it a true plug-and-play communications solution. Data collected by Enphase Envoy is then transmitted to the Enphase Enlighten website for monitoring and analysis.

# ENPHASE ENVOY TECHNICAL DATA

Interface	
Powerline LAN	Enphase Proprietary 10/100/1000 Auto-sensing, Auto-negotiating
Power Requirements	
AC Outlet Power Consumption	120 Vac, 60 Hz 5 Watts
Mechanical Data	
Dimensions (WxHxD) in Inches Weight Ambient Temperature Range Cooling Enclosure Environmental Rating	7.75" x 5" x 2.38" 2.0lbs -20°C to +65°C Natural Convection - No Fans Indoor - NEMA 1
Features	
Standard Warranty Term Compliance	1 Year UL 1950, EN 6950 FCC Part 15 Class B

## Enphase Energy, Inc.

201 1<sup>st</sup> Street, Suite 300, Petaluma, CA 94952  
877 797 4743 [enphaseenergy.com](http://enphaseenergy.com)